
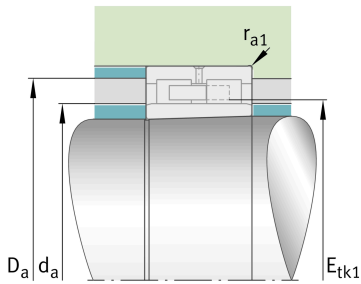


**FAG****NNU4924-S-K-M-SP**

Cylindrical roller bearing

Super precision cylindrical roller bearings
 NNU49..-S-K-M-SP, non-locating bearing,
 double row, with tapered bore, taper 1:12,
 separable, with cage

Technical information



Your current product variant

Cage	M	Brass Cage
Tolerance class	SP	Tolerance class SP
Bore type	K	Tapered, taper 1:12
Locating Feature , bearing outer ring	S	Lubrication holes and lubrication groove in outer ring
Radial internal clearance	C1 (Group 1)	Internal clearance smaller than C2
Number of rows	2	Double-row design

Main Dimensions & Performance Data

d	120 mm	Bore diameter
D	165 mm	Outside diameter
B	45 mm	Width
C_r	175.000 N	Basic dynamic load rating, radial
C_{0r}	340.000 N	Basic static load rating, radial
C_{ur}	41.000 N	Fatigue load limit, radial
$n_{G Grease}$	4.750 1/min	Limiting speed for grease lubrication
$n_{G Oil}$	5.600 1/min	Limiting speed for oil lubrication
$\approx m$	2,726 kg	Weight



Mounting dimensions

d_a	133,4 mm	Diameter shaft shoulder
	h12	Diameter shaft shoulder tolerance
D_a	154,5 mm	Diameter of housing shoulder
	H12	Diameter of housing shoulder tolerance
$r_{a1 \max}$	1 mm	Maximum recess radius





Dimensions

$r_1 \min$	1,1 mm	Minimum chamfer dimension
F	134,5 mm	Raceway diameter inner ring
n_s	6,5 mm	Width of lubricating groove
d_s	3,2 mm	Diameter lubrication hole
s	2,3 mm	Axial displacement

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	150 °C	Operating temperature max.

Characteristics

	Radial load
	Grease Lubrication
	Oil Lubrication
	Not sealed