



FAG


33019-XL-R-W215FB

Конический роликоподшипник

Tapered roller bearings with flange 330, main dimensions acc. to DIN 720, separable

X-life

Technical information

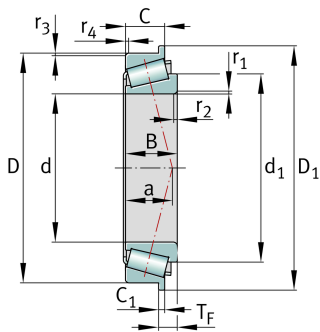


Your current product variant

Tolerance class	PN	Нормальный (ISO 492:2014)
Heat treatment	W215FB	Bainitic hardened
Cage	Standard	Sheet steel cage, window cage, roller-guided
Internal design	Standard	
Quality level	XL	X-life
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	95 mm	Bore diameter
D	145 mm	Outside diameter
B	39 mm	Width, inner ring
C	32,5 mm	Width, outer ring
T _F	12,5 mm	Width assembled flange bearing
C _r	290.000 N	Basic dynamic load rating, radial
C _{0r}	380.000 N	Basic static load rating, radial
C _{ur}	62.000 N	Fatigue load limit, radial
n _G	5.600 1/min	Limiting speed
n _{gr}	3.000 1/min	Thermal speed rating
m	2,41 kg	Weight

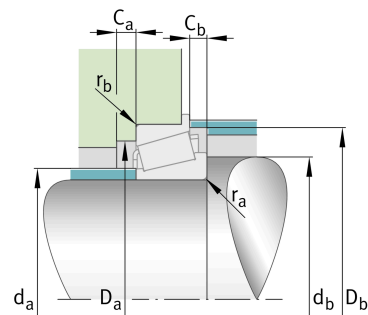



Mounting dimensions

$d_{a \max}$	104 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	104 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	131 mm	Minimum diameter of housing shoulder
$D_{a \max}$	136 mm	Maximum diameter of housing shoulder
$D_{b \min}$	139 mm	Minimum diameter of housing shoulder
$C_{a \min}$	7 mm	Minimum axial space
$C_{b \min}$	6,5 mm	Minimum axial space
$r_{a \max}$	2 mm	Maximum fillet radius of shaft
$r_{b \max}$	1,5 mm	Maximum fillet radius of housing

Dimensions

$r_{1, 2 \min}$	2 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \min}$	1,5 mm	Minimum chamfer dimension of outer ring back face
a	29 mm	Distance between the apexes of the pressure cones
d_1	120,8 mm	Guidance rib diameter of inner ring
D_1	151 mm	Outside diameter flange
C_1	6 mm	Width flange

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

Calculation factors

e	0,28	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	2,16	Dynamic axial load factor
Y_0	1,19	Static axial load factor



Additional information


T2CE095

Comparative designation to ISO 10317 and ISO 355


Characteristics



Radial load



Axial load in one direction



Grease Lubrication



Oil Lubrication



Not sealed