



FAG

B7006-E-T-P4S-UL

Spindellager

Spindellager B70...-E, angestellt, paar- oder satzweise, Druckwinkel $\alpha = 25^\circ$, eingengte Toleranzen

Technische Informationen




Your current product variant

Vorspannung	L	Vorspannung leicht
Druckwinkel	E	Druckwinkel 25°
Toleranzklasse	P4S	Toleranzklasse P4S, FAG-Standard besser als P4 nach ISO 492:2023
Dichtung	Ohne	Nicht gedichtet
Käfig		Hartgewebekäfig
Anordnung Lagersatz	U	Einzellager

Main Dimensions & Performance Data

d	30 mm	Bore diameter
D	55 mm	Outside diameter
B	13 mm	Width
C _r	13.700 N	Basic dynamic load rating, radial
C _{0r}	6.400 N	Basic static load rating, radial
C _{ur}	670 N	Fatigue load limit, radial
n _{G Grease}	24.000 1/min	Limiting speed for grease lubrication
n _{G Oil}	38.000 1/min	Limiting speed for oil lubrication
≈m	113,2 g	Weight

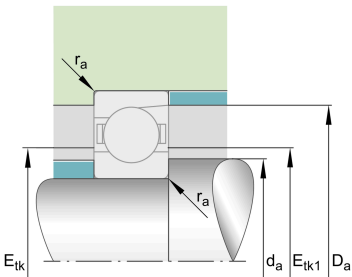



Mounting dimensions

d_a	36 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	49 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a \max}$	1 mm	Maximum recess radius
$r_{a1 \max}$	0,3 mm	Maximum recess radius
$E_{tk \min}$	39,4 mm	Minimum diameter injection pitch
$E_{tk \max}$	40,6 mm	Maximum diameter injection pitch
$E_{tk1 \min}$	39,4 mm	Minimum diameter injection pitch
$E_{tk1 \max}$	40,6 mm	Maximum diameter injection pitch
a	16,5 mm	Distance between the apexes of the pressure cones

Dimensions

r_{\min}	1 mm	Minimum chamfer dimension
$r_{1 \min}$	1 mm	Minimum chamfer dimension
α	25 °	Contact angle

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	100 °C	Operating temperature max.



Additional information

F_{VL}	102 N	Preload force light
F_{VM}	396 N	Preload force medium
F_{VH}	854 N	Preload force heavy
K_{aEL}	294 N	Lift-off force light
K_{aEM}	1.188 N	Lift-off force medium
K_{aEH}	2.661 N	Lift-off force heavy
c_{aL}	74 N/ μ m	Axial rigidity light
c_{aM}	123 N/ μ m	Axial rigidity medium
c_{aH}	170 N/ μ m	Axial rigidity heavy

Characteristics

-  Radial load
-  Axial load in one direction
-  Grease Lubrication
-  Oil Lubrication
-  Not sealed