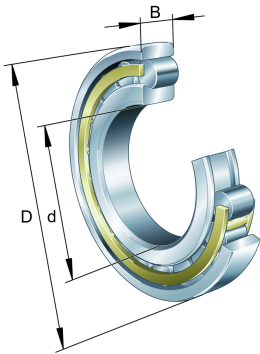


**FAG****N308-E-XL-M1-C3** [↗](#)

Cylindrical roller bearing

Cylindrical roller bearing N3..-E-M1, with cage, single row, non-locating bearing, 0 ribs on outer ring, 2 rib on inner ring, type N3

## Technical information

**Your current product variant**

Cage	M1	Two Piece Brass Cage Roller Guided
Tolerance class	PN	Normal (ISO 492:2023)
Change mark	E	Increased Capacity Design
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Number of rows	1	Single-row design

**Main Dimensions & Performance Data**

d	40 mm	Bore diameter
D	90 mm	Outside diameter
B	23 mm	Width
$C_r$	96.000 N	Basic dynamic load rating, radial
$C_{0r}$	79.000 N	Basic static load rating, radial
$C_{ur}$	13.600 N	Fatigue load limit, radial
$\approx m$	0,723 kg	Weight

**Mounting dimensions**

$d_a$	49 mm	Diameter shaft shoulder
$D_a$	81 mm	Diameter of housing shoulder
$r_{a1 \max}$	1,5 mm	Maximum recess radius

**Dimensions**

$r_{1 \min}$	1,5 mm	Minimum chamfer dimension
E	80 mm	Raceway diameter outer ring



### Temperature range

---

$T_{min}$                     -30 °C                    Operating temperature min.

$T_{max}$                     150 °C                    Operating temperature max.

### Characteristics

---

 Radial load

 Grease Lubrication

 Oil Lubrication

 Not sealed