

**FAG****32238-XL**

Tapered roller bearing

Tapered roller bearings 322, main dimensions
acc. to DIN 720, separable**X-life**



Teknik bilgiler

Mevcut ürün modeliniz

| | | |
|-----------------|----------|--|
| Tolerance class | PN | Normal (ISO 492:2014) |
| Heat treatment | Standard | |
| Cage | Standard | Sheet steel cage, window cage, roller-guided |
| Internal design | Standard | |
| Quality level | XL | X-life |
| Number of rows | 1 | Single-row design |

Main Dimensions & Performance Data

| | | |
|----------|-------------|-----------------------------------|
| d | 190 mm | Bore diameter |
| D | 340 mm | Outside diameter |
| B | 92 mm | Width, inner ring |
| C | 75 mm | Width, outer ring |
| T | 97 mm | Width, total |
| C_r | 1.340.000 N | Basic dynamic load rating, radial |
| C_{0r} | 1.820.000 N | Basic static load rating, radial |
| C_{ur} | 235.000 N | Fatigue load limit, radial |
| n_G | 2.340 1/min | Limiting speed |
| n_{gr} | 1.150 1/min | Thermal speed rating |
| m | 35,9 kg | Ağırlık |

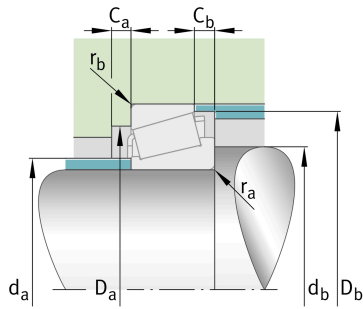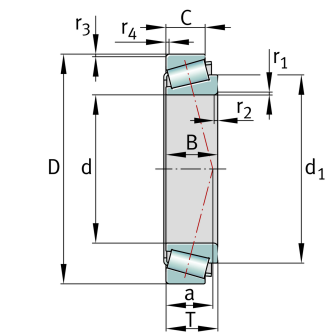



Mounting dimensions

| | | |
|--------------|--------|--------------------------------------|
| $d_{a \max}$ | 216 mm | Maximum diameter of shaft shoulder |
| $d_{b \min}$ | 207 mm | Minimum diameter of shaft shoulder |
| $D_{a \min}$ | 286 mm | Minimum diameter of housing shoulder |
| $D_{a \max}$ | 322 mm | Maximum diameter of housing shoulder |
| $D_{b \min}$ | 323 mm | Minimum diameter of housing shoulder |
| $C_{a \min}$ | 10 mm | Minimum axial space |
| $C_{b \min}$ | 22 mm | Minimum axial space |
| $r_{a \max}$ | 5 mm | Maximum fillet radius of shaft |
| $r_{b \max}$ | 4 mm | Maximum fillet radius of housing |

Dimensions

| | | |
|-----------------|--------|---|
| $r_{1, 2 \min}$ | 5 mm | Minimum chamfer dimension of inner ring back face |
| $r_{3, 4 \min}$ | 4 mm | Minimum chamfer dimension of outer ring back face |
| a | 81 mm | Distance between the apexes of the pressure cones |
| d_1 | 261 mm | Guidance rib diameter of inner ring |

Temperature range

| | | |
|------------|--------|----------------------------|
| T_{\min} | -30 °C | Operating temperature min. |
| T_{\max} | 200 °C | Operating temperature max. |

Calculation factors

| | | |
|-------|------|--|
| e | 0,43 | Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y |
| Y | 1,38 | Dynamic axial load factor |
| Y_0 | 0,76 | Static axial load factor |







Additional information

T4GD190

Comparative designation to ISO 10317 and ISO 355



Özellikleri

-  Radyal yük
-  Tek yönde aksel yük
-  Gres yağlama
-  Yağ ile yağlama
-  Kontaklız
-  Büyük rulman